

5 ProLaser 4 Menus

The menu button accesses the following settings or modes:

Distance	Sets min/max range limits to target vehicle for school and work zone enforcement. Fire the laser at the desired target and press enter to set min/max ranges. Any target measured outside the range limits will not be displayed.
Set Direction	Sets target direction discrimination to Approaching only, Receding only, or Both.
DIF-TEST	Two-target, differential distance accuracy test mode.
HUD Options	Toggle Range in HUD on/off. Select from four aiming


6 Accuracy Tests

Self-Test	Press the test button to run internal accuracy tests.
HUD Alignment Test	Place the ProLaser 4 in range mode. Select an isolated target ~100 feet away and sweep HUD horizontally and vertically across target. Listen for audio tone and verify aiming reticle on target coincides with tone and range measurement in HUD.
Differential Distance Test	Select two targets ~ 50 and 100 feet away. Target each when prompted and verify range accuracy.

ProLaser 4 Quick Start Guide


North Carolina Configuration

1 ProLaser 4 Rear Panel Display

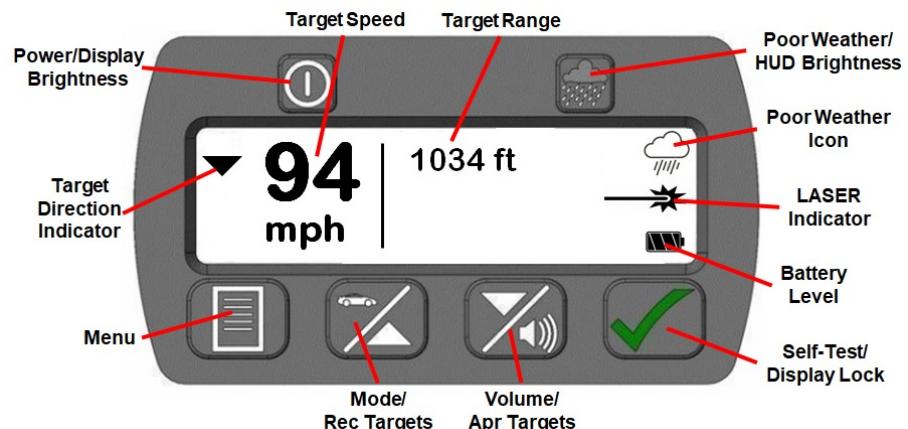


HUD Display

Range Mode
With Measurement

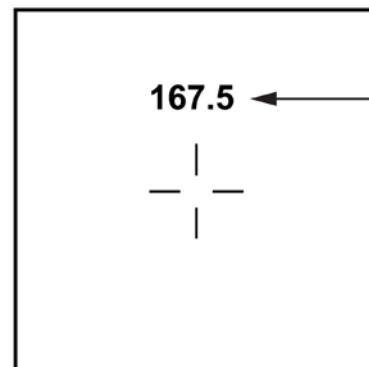

Speed Mode
With Measurement

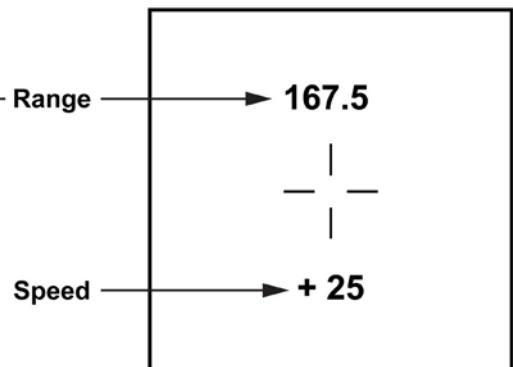

2 ProLaser 4 Multi-function Buttons

Single Press	Press and Hold
Rear Display Brightness	Power On/Off
HUD Brightness (Poor Weather in Menu)	Poor Weather Mode
Menu	
Mode Select Up (In Menu)	Receding Only Targets
Volume Down (In Menu)	Approaching Only Targets
Display Lock (Enter button in Menu)	Self-Test

4 Unit Description



3 First Time Operation

1. Install 4-AA batteries in the Battery Compartment, or plug in USB.
2. Press and hold the power button to power on/off.
3. Hold the unit by the grip with your face near the rear display and aim through the HUD with both eyes open.
4. Press and hold the trigger to fire the laser.
5. Place the aiming reticle on the target vehicle. Continue tracking history through the HUD.
6. While holding trigger down, Speed and Range continually update in the HUD and on rear display.
7. Audio tones provide targeting feedback. A solid tone indicates target successfully acquired.
8. Release the trigger to lock the measurement in the HUD and rear panel display.

The ProLaser 4 will enter default sleep mode after two (2) minutes, and will power down after 15 minutes. Sleep timers are adjustable.