



## Quick-Reference Guide

Thank you for purchasing the Argus body-worn camera (BWC) from Kustom Signals, INC. While Argus BWC offers a number of configurable features, actual operation is very simple. Once powered on, there are four controls available, with a prominent button in the middle to start recording. This guide should provide everything you need to know to start using your Argus device.

For support on your Argus body-worn camera, please visit the Kustom Help Desk at the URL below or contact Kustom Signals' Technical Support Services at 1-800-835-0156 or 1-620-431-2700.

### Getting Started

Please charge your Argus battery before the first use. A fully depleted battery will take less than 5 hours to charge but will provide up to 12 hours of recording time. Battery life is configuration-dependent.

Familiarize yourself with the controls and indicators detailed in this guide. Please refer to your Agency's Administrator for the process you will use to transfer files to your Argus Data Vault system and for information on configuration options.

Note that two options for configuring Argus are available:

- 1) Argus can be sent to the customer with default settings, and can be configured at the customer site by the Administrator.
- 2) Argus BWC can be configured by Kustom Signals for the customer prior to shipment.

### Hot Swappable Battery

Argus BWC offers the unique ability to allow the battery to be changed, by the end user in the field, even while actively recording, and without affecting the recording. Remove the back plate to expose the battery and then remove it using the plastic tab. Insert a new battery and reinstall the back plate.

### Event Detection

The Argus BWC will automatically start recording if it detects certain events. If the user begins rapidly moving, falls down, draws their weapon from a smart holster or says alarm phrases it will begin recording.

### Voice Commands

The Argus BWC will automatically start recording if it detects an alarm word. You can also initiate certain features by speaking a control word.


To begin keyword identification for one of the Control Words, say, "Activate BWC." You'll hear a short beep, feel a vibration, and see the keyword identification icon on the LCD screen, which means the device is ready for your command. Then, speak the control word.

### Control Words


- Activate BWC
- Start Recording
- Mute Audio
- Unmute Audio

### 4G Capabilities

If equipped with 4G capabilities, your device is capable of streaming live video to your Agency's Argus Data Vault system. Your device must be recording before streaming is possible. When streaming, the status LED light will turn blue.

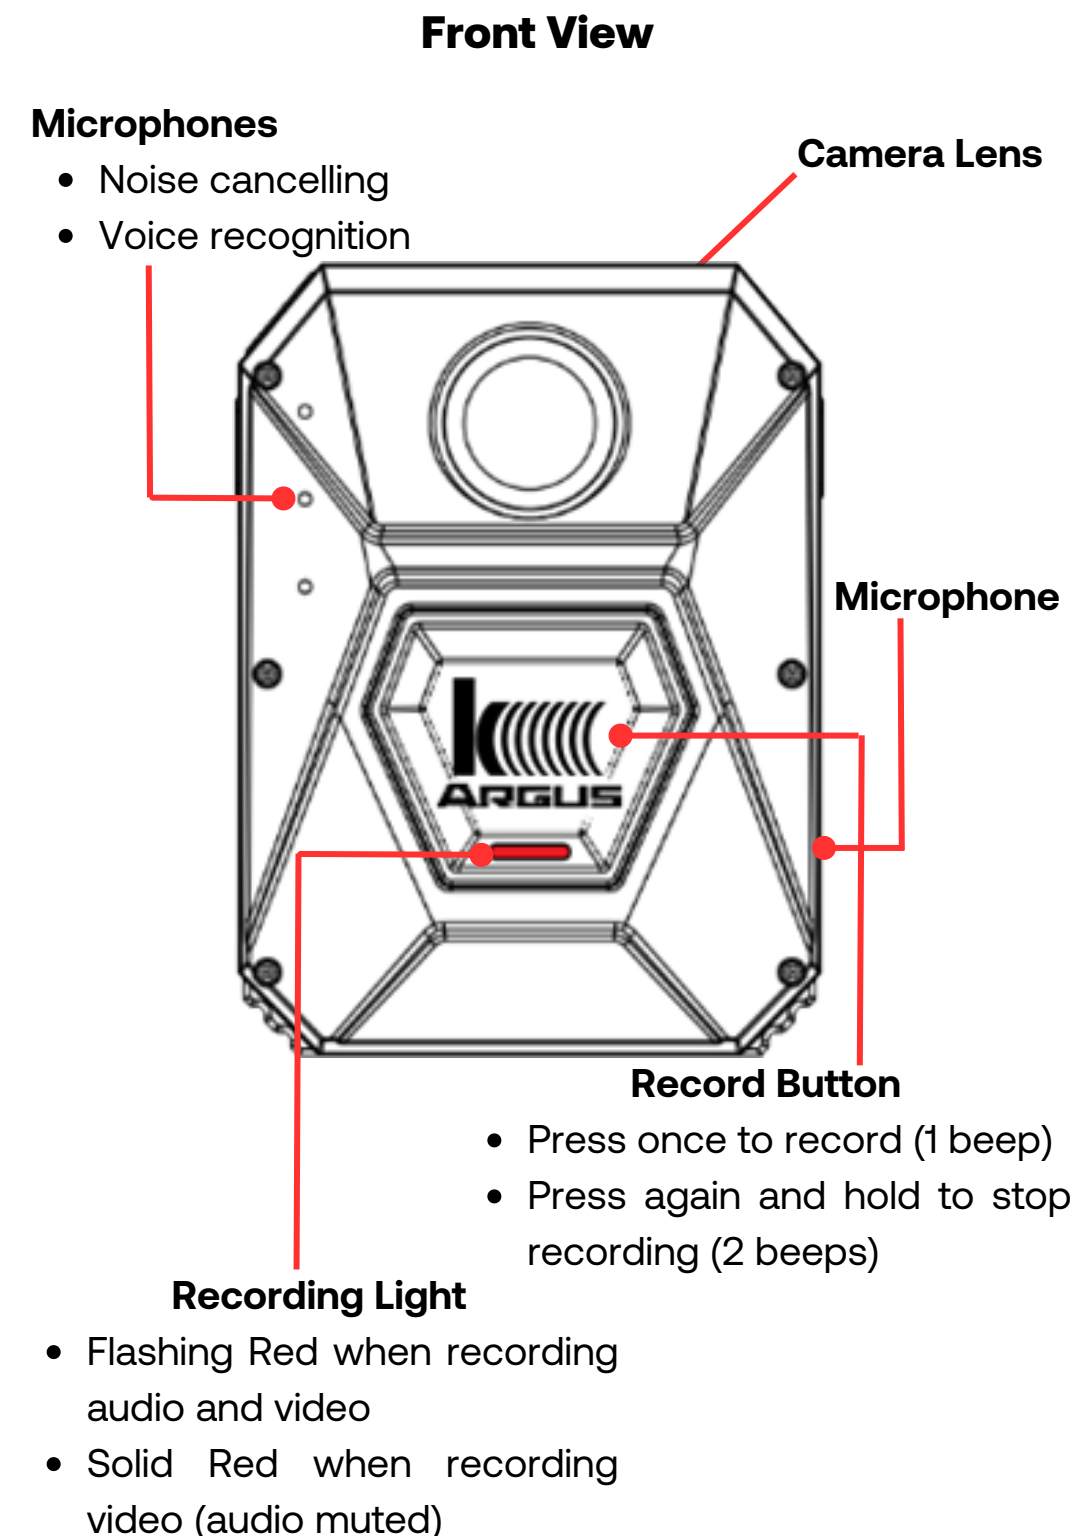

### Top View

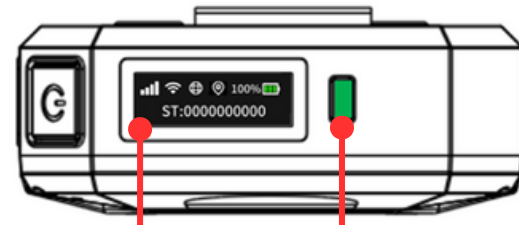


#### LCD Screen

- Displays system status

#### Status Light

- Red – record/charging
- Yellow – WiFi mode active
- Blue – Live streaming active
- Green – charge completed

### Left Side View

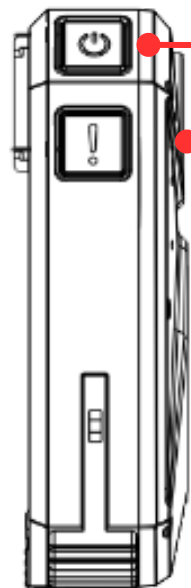

#### Power Button

- Short Press - powers camera on
- Long press 3s - powers camera off

#### Mark Button

- Short Press - Mark recording
- Long press 3s - SOS recording
- Press and hold with FN button - Stealth mode

### Right Side View



#### FN Button

- Double Press - activate/deactivate audio mute
- Press and hold 3s - activate/deactivate WiFi mode. Status LED turns blue
- Press and hold with Mark button - Stealth mode

### Stealth Mode

In stealth mode, the LCD screen, audio alerts, all LED lights will be disabled, but you will feel vibrations to know when recording starts or stops. To activate stealth mode, press and hold the FN and MARK buttons at the same time until "ENTER STEALTH MODE" appears on the screen. Wait for 5 seconds until the notification disappears, your device is now in stealth mode. To exit stealth mode, press and hold the FN and MARK buttons. Wait for the screen to return to normal and the device will switch back from stealth mode.

### Status Indicators

The top section of the LCD screen is the status bar. It shows icons for the 4G signal, WiFi mode, server connection, GPS positioning, battery percentage, and battery level displayed in order.

	<b>4G connection signal</b>
	<b>WiFi signal Indicator</b>
	<b>Argus Data Vault connection indicator</b>
	<b>GPS signal indicator</b>
	<b>Battery level</b>
	<b>Audio Recording</b>

### Charging Argus BWC

To charge your Argus device use a single or multi-dock station. The bottom side of the device features 6 contact pads. Align the contact pads on the device with pogo pins in a dock to charge the device and transfer data. When you insert the Argus into the dock, the dock status light will turn red, indicating a successful connection between the dock and the Argus device. While the device is charging, the status light on the BWC will blink green. When the battery is fully charged, the status light will turn solid green.


### Argus Configuration

Your Argus BWC has been configured to your agency's specific needs. Changes to the device require your Agency's Administrator's assistance.

### Recording

Your Argus has the ability to start recording in many ways. You can manually start recording by pressing the record button or holding down the mark button for 3 seconds. When Argus starts capturing, you will see correlating symbols on the LCD screen that show the active recording mode, and the status light will change.

\*Note: You will also receive periodic reminders, in the form of short audible beeps and vibrations, to let you know that recording is in progress. You can configure these reminders using the Argus Insight mobile application.

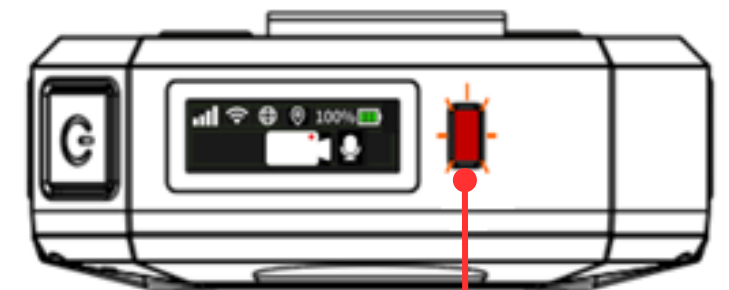

Flashing red light